HYPERTEC
MAKING IT PERFORM
www.hypertec.co.uk

Firestorm USB3.0

Next Generation Storage

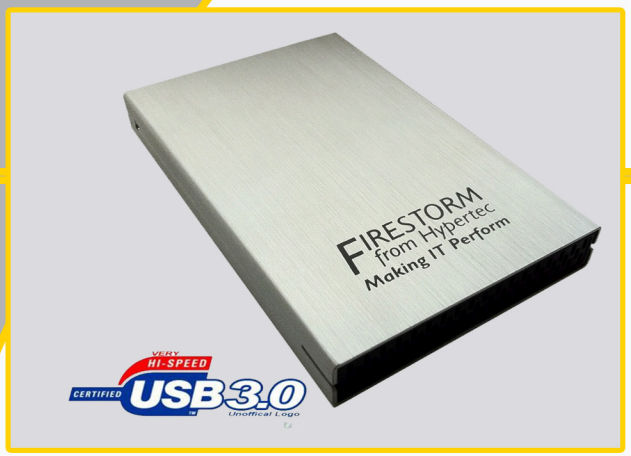

USB3.0 External Notebook Drives

Hypertec's best selling Firestorm External Hard Disk Drives have been updated to keep up with future demand for speed - Now featuring both USB2.0 and USB3.0 connectivity.

Part Numbers

Available from 160GB to 1TB

FSN-160U3	160GB 2.5" USB3.00 HDD
FSN-320U3	320GB 2.5" USB3.00 HDD
FSN-500U3	500GB 2.5" USB3.00 HDD
FSN-1000U3	1TB 2.5" USB3.00 HDD

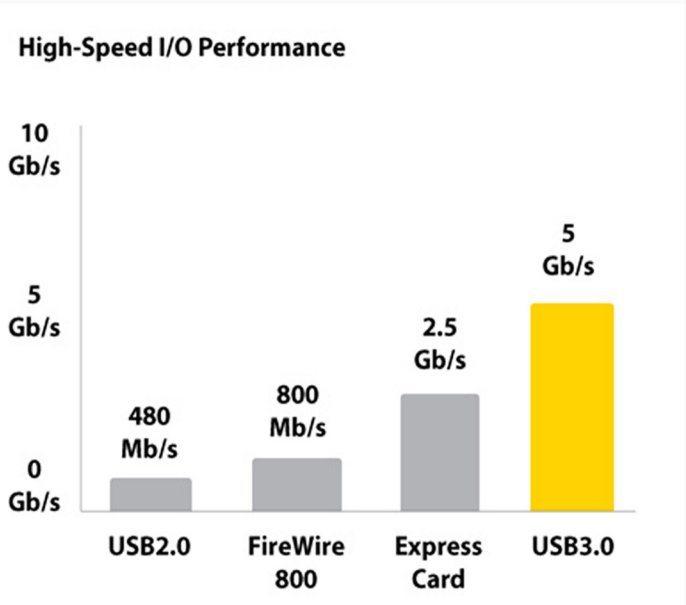

10x Faster Transfer Speeds

USB3.0 is completely backwards compatible with existing USB2.0 ports, so there are no issues for users looking to move over to USB3.0 products from other USB2.0 options, including the existing Firestorm USB2.0 range. Users with USB3.0 ports will be able to enjoy the increased speeds that USB3.0 offers in comparison to USB2.0 - A significant increase in performance of approximately 10x faster transfer speeds.

- **Dual USB3.0 and USB2.0 Compatibility**
- **5Gb/s USB3.0 Transfer Rate**
- **Aluminium Casing**
- **Straightforward Plug & Play Operation**
- **Bus Powered**
- **3 Years Warranty**

Warranty & Support

As with all Hypertec solutions, the Firestorm USB3.0 External Hard Drive is fully tested and configured prior to shipping. Backed by a full 3 year warranty and free UK based lifetime technical support.

Hard Drives are pre-formatted as NTFS volumes. The drive can easily be re-formatted for HFS+ for Mac users. For more information about formatting, please speak to your Hypertec Account Manager to request alternative formating.

t: 0844 879 2282
f: 0844 879 2283
e: info@hypertec.co.uk

HYPERTEC
MAKING IT PERFORM
www.hypertec.co.uk

Firestorm USB3.0

Technical Specification

CONTENTS

- 1 x Firestorm 2.5" Hard Disk Unit
- 1 x USB Data Cable
- No drivers required - driver-free and plug-and-play unit

INTERFACE

- Hi-Speed USB Interface USB3.0 and USB1.1, USB2.0 backward compatibility, eSATA

CAPACITY

- 160GB - 1TB

TRANSFER RATE

- USB3.0 - 5Gb/s

BUS POWERED?

- Yes

HARDWARE SUPPORTED ON:

- Windows 2000, Windows XP, Windows 7, MAC OS 9.x, Mac OS X and greater

SYSTEM REQUIREMENTS

- PC or Mac with built-in powered USB interface, Intel Pentium II 350MHz compatible processor or greater iMac, Apple G3/G4/G5/Intel processor, minimum 32MB RAM

APPROVALS

- FCC/CE RoHS. This product is covered by WEEE

PHYSICAL

- Size - 121mm x 78mm x 15mm

ENVIRONMENT RATINGS

- Operating Temperature - 0C to 70C
- Storage Temperature - -20C to 70C
- Operation Humidity - 10% to 90% RH
- Storage Humidity - 5% to 95% RH

t: 0844 879 2282
f: 0844 879 2283
e: info@hypertec.co.uk